




**TORUS  
POWER™**


**Toroidal  
Isolation  
Power**

**Conditioning**

# Owner's Manual

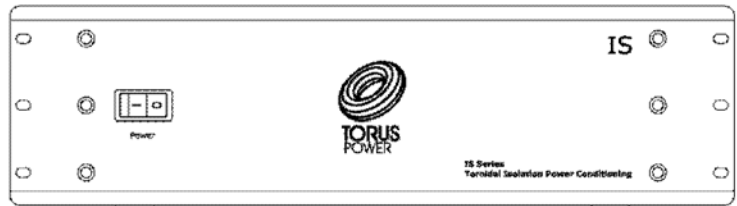

19" Pro Series Rack Mount (RK) Faceplate

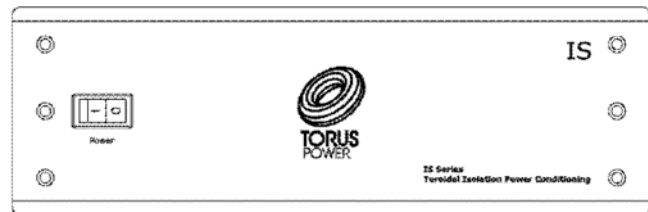

17" Consumer Series (C) Faceplate  
Available in Black (B) and Silver (S) Colours


## Power Conditioners Audio / Video Power Isolation Units IS Series Rack Mount / Consumer

Model Number	Maximum Available Output Current	Input Voltage	Output Voltage	Output Connector
IS 8 515R RK	8A	220-240VAC	220-240VAC	10 outlets
IS 8 515R CB				Medical-grade
IS 8 515R CS				15A

**“Custom unit as per customer request. Electrical and safety approvals are the responsibility of distributor/customer.”**

**Warning: This unit is custom configured with NEMA 5-15R output receptacles rated at 125V/15A. The output voltage present at these outlets is 220-240VAC nominal.**

## Important Safety Instructions

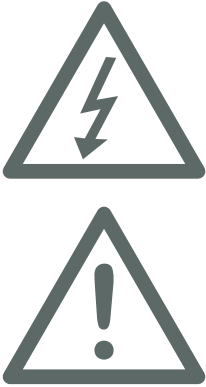

**CAUTION!** To reduce the risk of electric shock and fire, do not remove the cover of this device. There are no user serviceable parts inside. Please refer all servicing to licensed service technicians.

**CAUTION!** The international symbol of a lightning bolt inside a triangle is intended to alert the user to uninsulated "dangerous voltage" within the device's enclosure. The international symbol of an exclamation point inside a triangle is intended to alert the user to the presence of important operating, maintenance and servicing information in the manual accompanying the device.

**CAUTION!** To prevent electrical shock, match wide blade of plug to wide slot, fully insert.

**CAUTION!** To reduce the risk of electrical shock, do not expose this equipment to rain or moisture.

1. Read Instructions—All safety and operating instructions should be read before operating the device.
2. Retain Instructions—The safety and operating instructions should be retained for future reference.
3. Heed Warnings—All warnings on the device and in the operating instructions should be adhered to.
4. Follow Instructions—All operating and safety instructions should be followed.
5. Water & Moisture—The device should never be used in, on or near water for risk of fatal shock.
6. Ventilation—The device should always be located in such a way that it maintains proper ventilation. It should never be placed in a built-in installation or anywhere that may impede the flow of air through its ventilation slots.
7. Heat—Never locate the device near heat sources such as radiators, floor registers, stoves or other heat-generating devices.
8. Power Cord Protection—Power cables should be routed so they are not likely to be stepped on or crushed by items placed on them or against them. Special attention should be paid to areas where the plug enters a socket or fused strip and where the cord exits the device.
9. Periods Of Non-Use—The device should be unplugged when not being used for extended periods.
10. Dangerous Entry—Care should be taken that no foreign objects or liquids fall or are spilled inside the device.
11. Damage Requiring Service—The device should be serviced by licensed technicians when:
  - The plug or power supply cord has been damaged.
  - Objects have fallen or liquid has spilled inside the device.
  - The device has been exposed to moisture.
  - The device does not appear to be operating properly or exhibits a marked change in performance.
  - The device has been dropped or the enclosure becomes damaged.
12. Service—The device should always be serviced by licensed technicians. Only replacement parts specified by the manufacturer should be used. The use of unauthorized substitutions may result in fire, shock, or other hazards.
13. Do not position the equipment so that it is difficult to operate the disconnecting device (power cord).
14. If the equipment is used in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired.
15. The power switch should be in the "off" position when connecting or disconnecting equipment from a Torus Power unit.
16. **CAUTION** Some units can be very heavy, please use safe practices when lifting.



≥18 kg (39.7 lb)





≥32 kg (70.5 lb)




≥55 kg (121.2 lb)



## Front Panel Layout

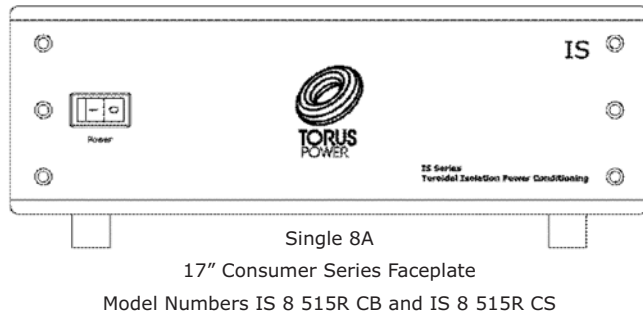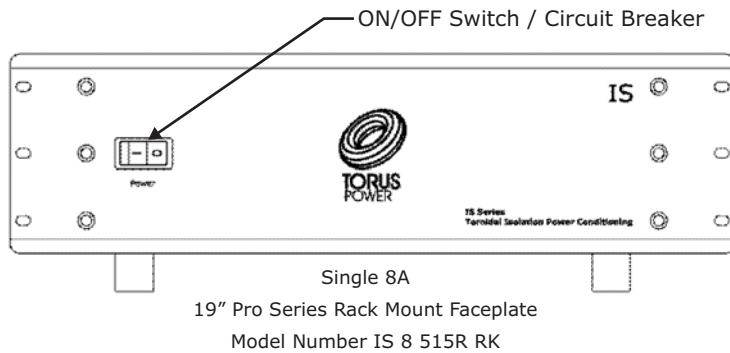

## Rear Panel Layout

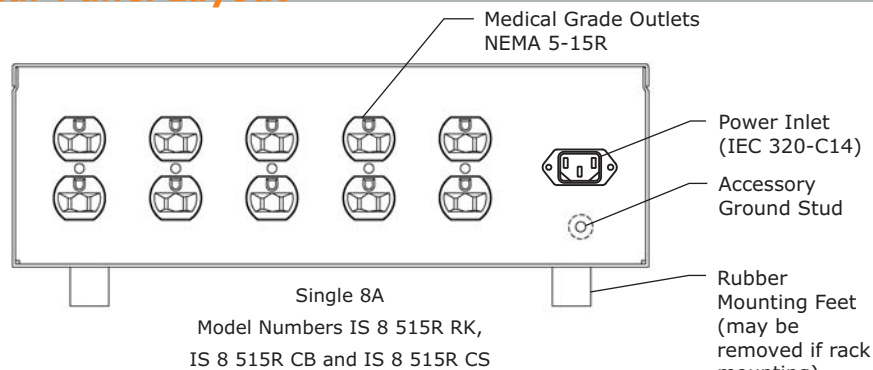

## Circuit Protection

The front panel power switch is also a circuit breaker. As a circuit breaker, it prevents excessive current from entering the PIU.

When the power is on, the switch is illuminated. When the breaker trips, the switch returns to its "off" position.

## Thermal Protection

Torus PIUs will shut-down if internal unit temperature reaches excessive levels.

## Input Current Rating

Per UL, CSA and National Electrical codes, devices with line cords and plugs must not consume more than 80% of a branch circuit's rating.

While Torus Power Isolation Units are designed to handle well beyond these limits, they must be marked with a maximum input current that satisfies the requirements.

## Wall Receptacles

Torus PIUs are high-power products. The outlets they are plugged into should be sufficient to provide the current to operate them without tripping circuit breakers within your junction panel.

## Electrical Specifications

Model Number	Input Voltage Nominal	Input Current Limiting	Output Voltage Nominal	Load Current Capability			Maximum Available Output Current (see note above)
				½ cycle	1 second	10 seconds	
IS 8 515R RK	220-240VAC	8A	220-240VAC	80A	48A	16A	8A
IS 8 515R CB	Range +/- 10% voltage	Circuit Breaker					
IS 8 515R CS	47-53Hz	Front Panel					

## Mechanical Specifications

Model Number	Input Connector (Rear Panel)	Line Cord	Output Connector (Rear Panel)	Weight	Size, mm (w x d x h)
IS 8 515R RK	IEC 320-C14	Included	Qty 5 (10 outlets)	34.0 kg	483 x 402 x 154
IS 8 515R CB			Medical-grade duplex	33.0 kg	432 x 402 x 162
IS 8 515R CS			NEMA 5-15R		

Height includes rubber mounting feet.



## Description

---

Torus Power IS Series Power Conditioner is available in a 8A model. This model includes 120V/60Hz medical grade outlets, available in a choice of aluminum silver or black 17" faceplates, or black 19" rack mount style.

Torus Power Isolation Power Line Conditioners include unique toroidal transformer technologies from PLITRON to provide the ultimate in AC power conditioning and protection for sensitive audio and video equipment applications.

Isolation is combined with proven proprietary technologies from PLITRON in the over-sized toroidal transformer. NBT works as a low pass filter using the controlled leakage

inductance and capacitances within the transformer to effectively reduce noise. LoNo technology has been used for years by high-end audio companies who demand silent transformers. UST provides additional common mode filtering using a highly efficient Faraday screen.

Low output impedance technology allows high instantaneous peak current capability, providing the most unconstrained, yet protected, energy source available to your equipment.

## Shipping Carton & Packing Material

Please keep the original shipping box and all packing material. This will ensure the PIU is protected in future transport.

In the unlikely event you have a problem and must return it for service you must use the proper packing material.

Ship the PIU only in the original packing material, as the unit is not insurable by carriers otherwise.

## Placement & Ventilation

---

Torus Power PIUs are extremely efficient devices, however, they are also very high-power devices, and must be adequately cooled.

PIUs have ventilation slots on the base, side panels and the cover. Maintain at least 2.5cm distance from each of these surfaces to anything else. Should your installation conditions be constricted, additional forced air-cooling may be necessary.

Do not install the PIU directly above heat-generating equipment.

Maintain at least 15cm behind the PIU for adequate wiring space.



## Warranty

---

Torus Power products are warranted to be free from manufacturing defects for five years from the original date of sale. This includes parts, labour and return shipping to the first registered owner and all subsequent registered owners. Warranty coverage is extended to applicable products registered or having proof-of-purchase (sales invoice, etc.).

In the event of a defect or malfunction, Torus Power will remedy the problem by repair or replacement, as we deem necessary, to restore the product to full performance.

This warranty is considered void if the defect, malfunction or failure of the product or any component part was caused by damage (not resulting from a defect or malfunction) or abuse while in the possession of the customer. Failure to fully comply with Torus Power operating instructions, voids the warranty.

---



Torus Power products are marketed worldwide through Plitron Manufacturing Inc.

**For sales contact:**

**[torussales@plitron.com](mailto:torussales@plitron.com)**

Phone: 416-667-9914

Toll free: 1-800-754-8766

Fax: 416-667-8928

**Technical inquiries:**

**[torustechnical@plitron.com](mailto:torustechnical@plitron.com)**

Phone: 416-667-9914



**[www.TorusPower.com](http://www.TorusPower.com)**

Torus Power  
#8 601 Magnetic Drive  
Toronto, ON M3J 3J2  
Canada  
416-667-9914

Specifications subject to change without notice.  
© Torus Power 2013